
Sustainability data sheet

ARDEX R 4 RAPID Universal Smoothing Compound

Repair Filler with finish character for wall and ceiling areas. For filling holes and breaks. Applicable without primer.

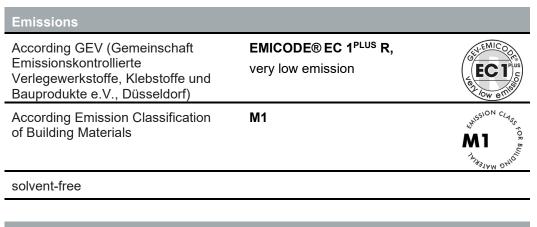

EPD (Environmental Product Declaration)

ARDEX R 4 RAPID corresponds to FEICA EPD:

EPD-FEI-20160042-IBG1-EN

BASTA

According BASTA

ARDEX R 4 RAPID is BASTA registered.

BASTA registration means that we can verify that this product meets agreed properties criteria regarding properties hazardous to the environment and health. See www.bastaonline.se

Technical Assessment

According GISBAU (TRGS 610, Technische Regeln für Gefahrstoffe):

GISCODE ZP1 - cementitious product, low-chromate

ARDEX GmbH Friedrich-Ebert-Straße 45 58453 Witten www.ardex.de

Tel.: +49 2302 664-511 Fax: +49 2302 664-298 kundendienst@ardex.de www.ardex.de



ARDEX R 4 RAPID

Universal Smoothing Compound

Sustainable Building

According DGNB (Deutsche Gesellschaft für Nachhaltiges Bauen)

Version 2018

DGNB criteria ENV 1.2: Local environmental impact

ARDEX R 4 RAPID can be classified as primers, primer coatings, putties and adhesives under wall and floor coverings (eg. Tiles, carpets, wooden floors, resilient flooring – except wallpaper).

ARDEX R 4 RAPID has the GISCODE ZP1 and is certified by EMICODE[®] EC 1^{PLUS} R, very low emission, based on GEV.

ARDEX R 4 RAPID fulfills the requirements for highest Quality Level 4.

Version 2015

DGNB criteria ENV 1.2: Local environmental impact ARDEX R 4 RAPID can be classified as primers, primer coatings, putties and adhesives under wall and floor coverings (eg. Tiles, carpets, wooden floors, resilient flooring – except wallpaper).

ARDEX R 4 RAPID is certified by EMICODE[®] EC 1^{PLUS} R, very low emission, based on

GEV.

ARDEX R 4 RAPID fulfills the requirements for highest Quality Level 4.

According LEED (Leadership in Energy and Environmental Design)

Version 4 (2014)

EQ: Low Emitting Materials

ARDEX R 4 RAPID meets the requirements according EMICODE® EC 1^{PLUS} R, very low emission, based on GEV which are accepted by LEED.

ARDEX R 4 RAPID meets the requirements and contributes to achieving one LEED point under EQ: Low Emitting Materials.

MR: Building Product Disclosure and Optimization – Environmental Product Declaration

ARDEX R 4 RAPID corresponds to a model EPD by FEICA, which provides the evidence of a life cycle assessment (LCA) "cradle to gate".

ARDEX R 4 RAPID meets the requirements and contributes to achieving one LEED point under MR: Building Product Disclosure and Optimization – Environmental Product Declaration.

Version 2009 IEQ Credit 4.1: Low Emitting Materials: Adhesives and Sealants Cementitious fillers are not described by LEED.

MR Credit 5.1 und 5.2: Regional Materials Production site: 58453 Distance Production site – Project site < 800 km

Products that are used regionally within a 500 mile (800 kilometer) can be contributed to achieving one LEED point.

ARDEX GmbH Friedrich-Ebert-Straße 45 58453 Witten www.ardex.de

Tel.: +49 2302 664-511 Fax: +49 2302 664-298 kundendienst@ardex.de www.ardex.de



ARDEX R 4 RAPID

Universal Smoothing Compound

Sustainable Building

According BREEAM-NOR (Building Research Establishment Environmental Assessment Methodology)

Version 2016

BREEAM-NOR criteria Hea 02 Indoor air quality

ARDEX R 4 RAPID fulfills the required emission limits and is certified by EMICODE® EC 1^{PLUS} R, very low emission, based on GEV and by M1 which is accepted as documentation.

ARDEX R 4 RAPID meets the requirements according BREEAM-NOR and contributes to achieving one credit under Hea 02 Indoor air quality.

Notice: This data sheet has been compiled based on state-of-the-art technology and our experience. In spite of diligent treatment of all information ARDEX GmbH cannot guarantee the actuality or correctness of the published data. The interpretation of building certification criteria can differ and depend on the project and scope of application. The content of these data sheet does not manifest any legal relationship.

Additionally, the current information given in the Technical and the Material Safety Data Sheet have to be considered.

ARDEX GmbH Witten, 09/02/2018

ARDEX GmbH Friedrich-Ebert-Straße 45 58453 Witten www.ardex.de

Tel.: +49 2302 664-511 Fax: +49 2302 664-298 kundendienst@ardex.de www.ardex.de

